




Load 800Kg
SF ALPHTIC Series | Heavy-Duty Robot
Model: SF800-C3200 PA

The SF ALPHTIC is the most powerful and technologically advanced heavy-duty robot, ideal for large, high-load applications, and its rugged construction makes the SF ALPHTIC the perfect combination of power and technology.

The SF ALPHTIC is CHAIFU's heavy-duty robot perfectly matched to any application thanks to its ultra-high craftsmanship and rugged structural design. The powerful motors and gearboxes are designed to perform a wide range of heavy-duty tasks. The long working stroke of 3177 mm allows it to fit comfortably in small work cells. The three core components of the CHAIFU convince with their low cost, high efficiency, and low maintenance, even in heavy-duty applications.

All SF ALPHTIC series are equipped with LIKEPRECISION technology and the highest precision joint part reducer, RV Reducer, which enables the robot to take full advantage of its advantages even in high-speed operation.


Applications

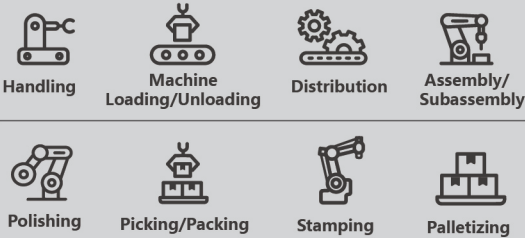


SF800-C3200 PA Data Overview

Model		SF800-C3200PA
Structure		Vertically Articulated
Number of Axis		4
Radius		3177mm
Payload		800kg
Repeatability		±0.3mm
Drive Mode		AC Servo Motor
Maximum Speed	J1	60°/s
	J2	60°/s
	J3	60°/s
	J4	125°/s
	J5	/
	J6	/
Range of Motion	J1	±180°
	J2	+50° / -85°
	J3	+15.5°/-113°
	J4	±360°
	J3 - J2	-68°≤J3-J2≤+75°
	J2 + J3	-130°≤J2+J3≤+60°
Allowable Moment	J4	2450N.M
	J5	/
	J6	/
Allowable Inertia	J4	480kg·m ²
	J5	/
	J6	/
Protection Rating		IP 65, Wrist IP 67
Operating Conditions	Temp.	0-45°C
	Humidity	Below 95%RH
	Vibration	Below 4.9m/s ²
	Other	Eliminate Signal Noise
Base Size		910×739mm
Height		2629mm
Weight		2968KG
Mounting Positions		Floor
Power Consumption		8kVA


SF800-C3200 PA 机器人运动范围图

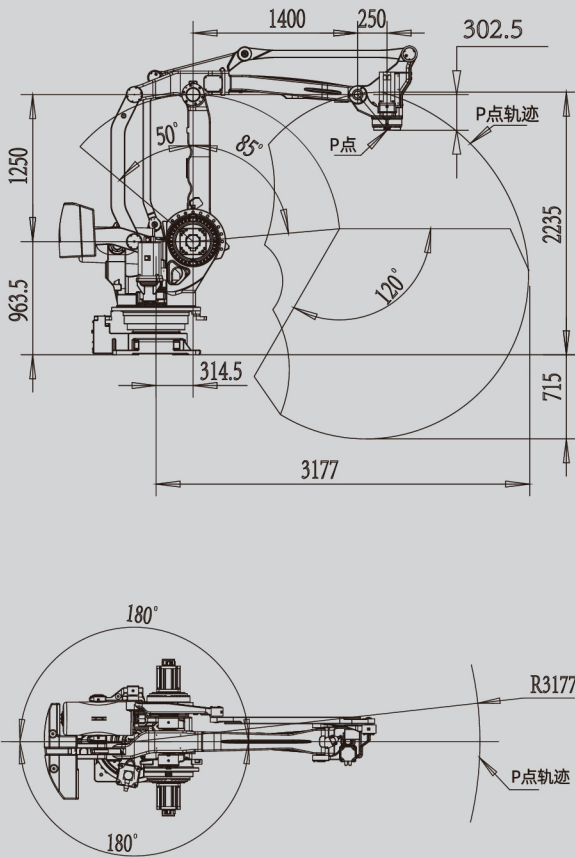

SF800-C3200PA External & installation dimensions

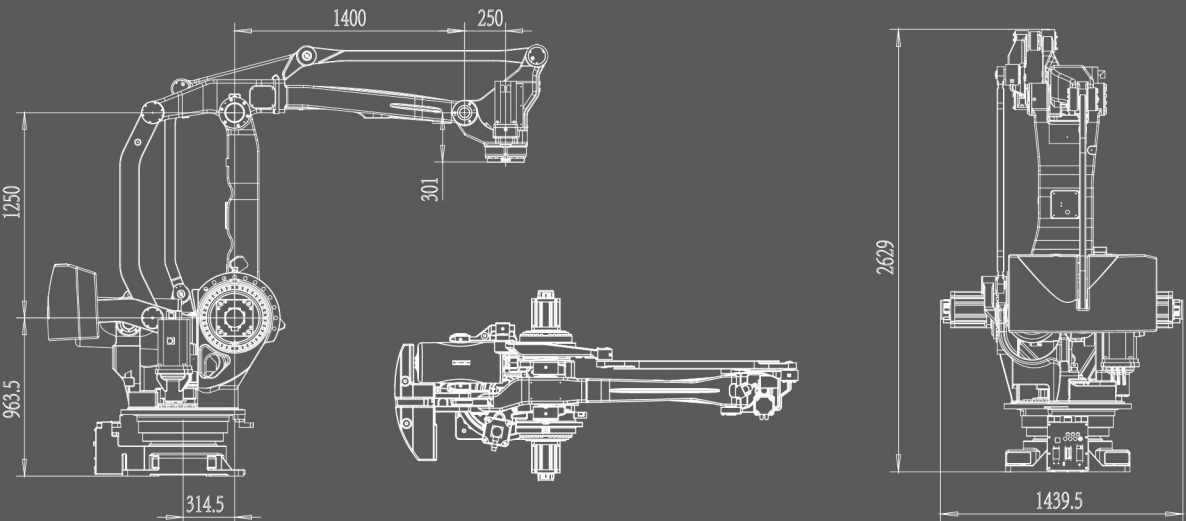

A-view (end flange installation dimensions)

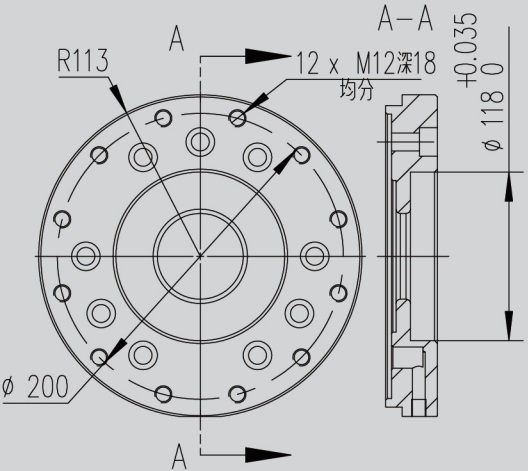

B-view (base installation dimensions)

