



Load 20Kg

SF MIMETIC Series | Medium duty robot
Model: SF20 - C2150

The SF MIMETIC is a medium payload industrial robot with a superior working range, advanced servo control technology, and an extremely rigid arm, significantly reducing cycle times and ensuring high productivity.

SF MIMETIC is a complete solution for medium payload class industrial robots to secure your future planning and production investment. From 20 kg up to 120 kg of fine load breakdown.


It is the perfect solution to ensure accuracy and production quality. Whether handling, machine loading/unloading, painting, stamping, palletizing, grinding, picking/packing, or assembly/distribution. In addition, you will have the freedom to choose the robot corresponding to your actual needs for greater efficiency and economic benefits.

All SF MIMETIC series are equipped with LIKEPRECISION technology, he ultra-precise RV Precision Gearbox, which enables the robot to take full advantage of its advantages even at high operating speeds.

Applications




SF20-C2150 Wrist load torque chart

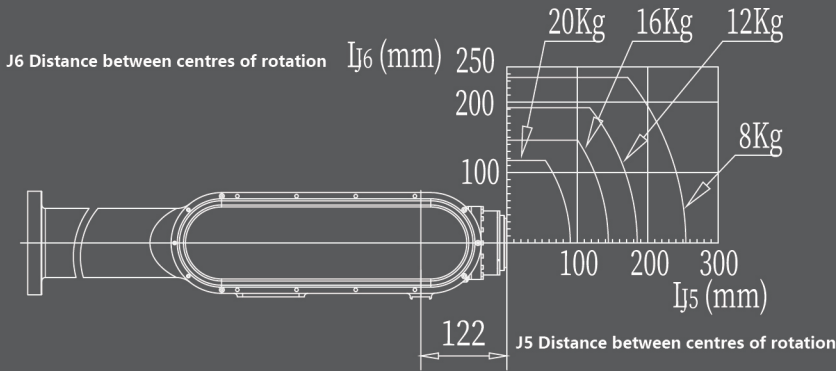


SF20-C2150 Data Overview

Model	SF20-C2150	
Structure	Vertically Articulated	
Number of Axis	6	
Radius	2150mm	
Payload	20kg	
Repeatability	±0.06mm	
Drive Mode	AC Servo Motor	
Maximum Speed	J1	140° /s
	J2	140° /s
	J3	140° /s
	J4	350° /s
	J5	230° /s
	J6	250° /s
Range of Motion	J1	±170°
	J2	+100° /-157°
	J3	+95° /-80°
	J4	±180°
	J5	±125°/-125°
	J6	±720°
Allowable Moment	J4	42N.M
	J5	42N.M
	J6	23N.M
Allowable Inertia	J4	1.26kg.m2
	J5	1.26kg.m2
	J6	0.49kg.m2
Protection Rating	IP 65	
Operating Conditions	Temp.	0-45°C
	Humidity	Below 95%RH
	Vibration	Below 4.9m/s2
	Other	Eliminate Signal Noise
Base Size	396*396mm	
Height	1618.5mm	
Weight	246KG	
Mounting Positions	Floor、 Wall、 Ceiling	
Power Consumption	3.8kVA	


SF20-C2150 Range of Motion

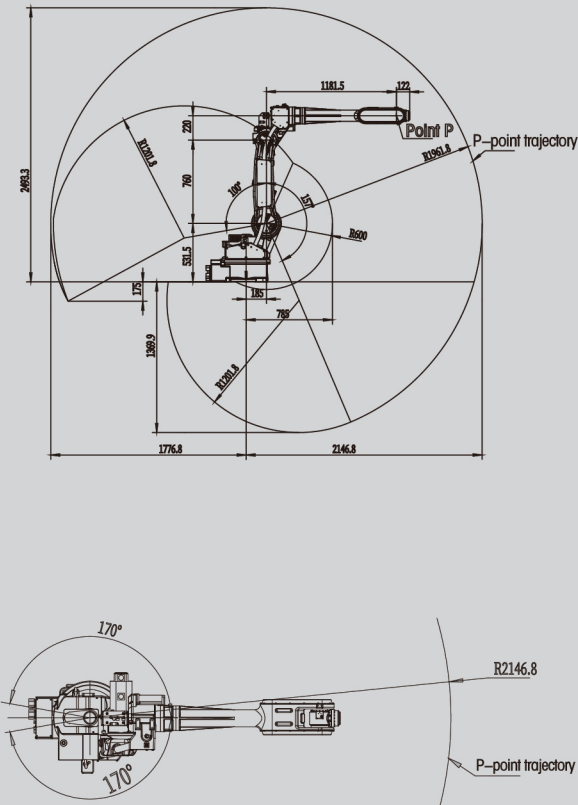

External & Installation Dimensions

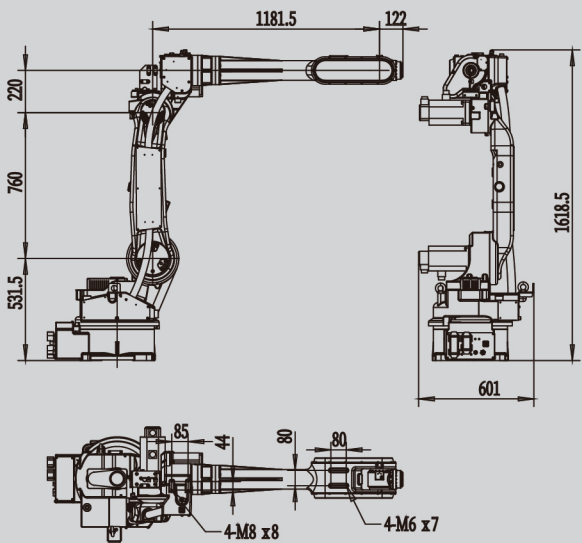

A-Way Diagram
(End Flange Mounting Dimensions)

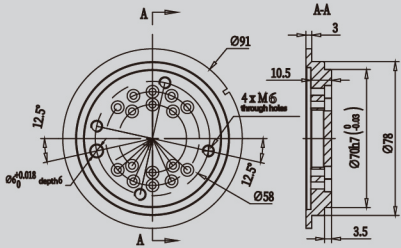

B-Way Diagram (Base Mounting Dimensions)

