



Load 2400Kg

ALPHTIC Series | Heavy-Duty Robot
Model: SF2400 - C3760

The ALPHTIC is the most powerful and technologically advanced heavy-duty robot, ideal for large, high-load applications, and its construction makes the ALPHTIC the perfect combination of power and technology.

The ALPHTIC is CHAIFU's heavy-duty robot perfectly matched to any application due to its ultra-high craftsmanship and rugged structural design. The powerful motors and gearboxes are designed to perform a wide range of heavy-duty tasks. The long working stroke of 3758.8 mm allows it to fit comfortably in small work cells.

The three core components of the CHAIFU convince with their low cost, high efficiency, and low maintenance, even in heavy-duty applications.

All ALPHTIC series are equipped with LIKEPRECISION technology and the highest precision joint part reducer, RV Reducer, which enables the robot to take full advantage of its advantages even in high-speed operation.


Applications




SF2400-C3760 Data Overview

Model	SF2400-C3760	
Structure	Vertically Articulated	
Number of Axis	6	
Radius	3758.8mm	
Payload	2400kg	
Repeatability	±0.3mm	
Drive Mode	AC Servo Motor	
Maximum Speed	J1	20°/s
	J2	12°/s
	J3	12°/s
	J4	19°/s
	J5	19°/s
	J6	40°/s
Range of Motion	J1	±180°
	J2	+53°/-85°
	J3	-113°/+22.5°
	J4	±360°
	J5	±115°
	J6	±360°
Protection Rating	IP 65, Wrist IP 67	
Operating Conditions	Temp.	0-45°C
	Humidity	Below 95%RH
	Vibration	Below 4.9m/s2
	Other	Eliminate Signal Noise
Base Size	1580*1670mm	
Height	3875mm	
Weight	17600KG	
Mounting Positions	Floor	
Power Consumption	20.5kVA	


SF2400-C3760 Range of Motion

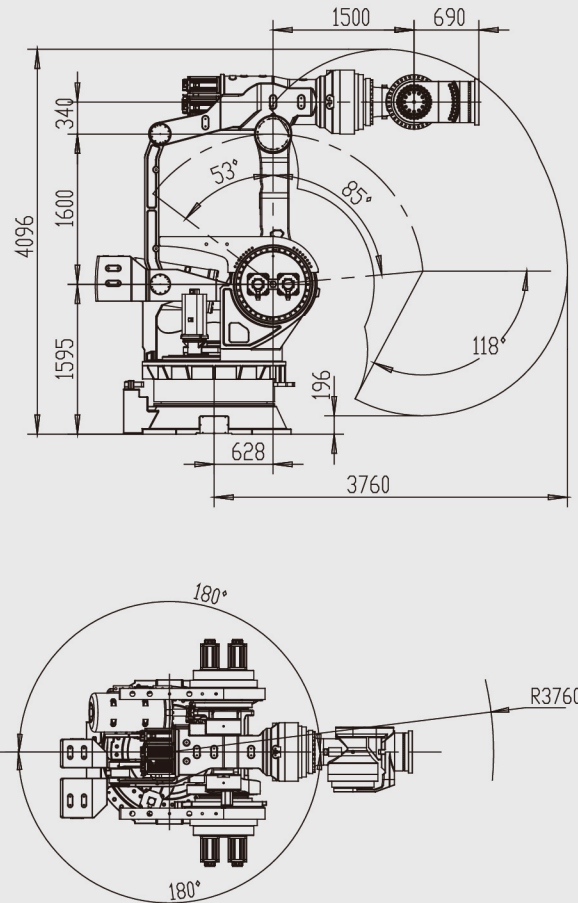

SF2400-C3760 External & Installation Dimensions

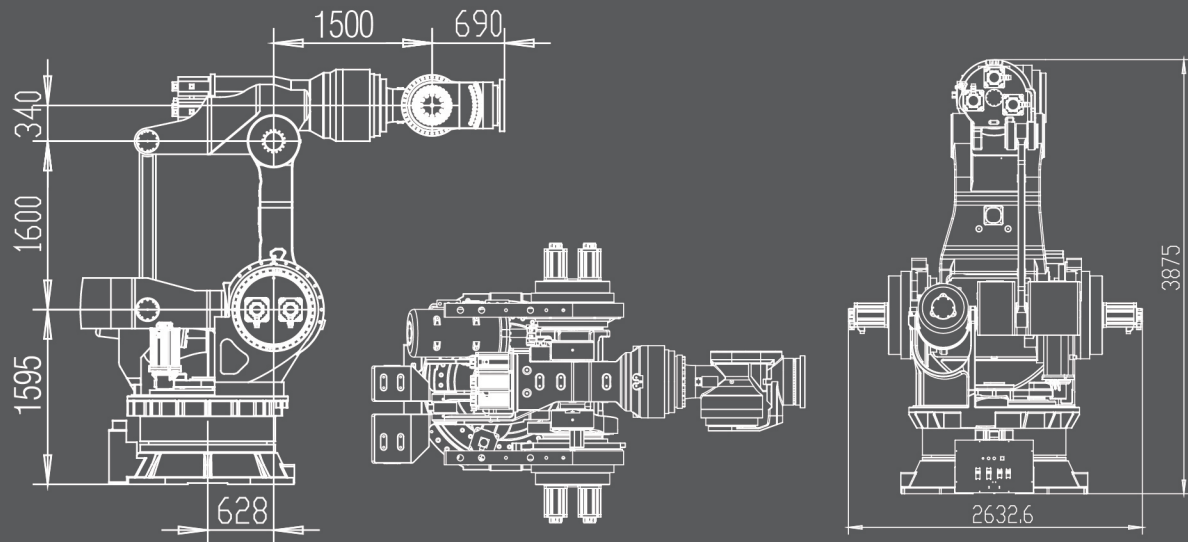

A Q view (end flange mounting dimensions)

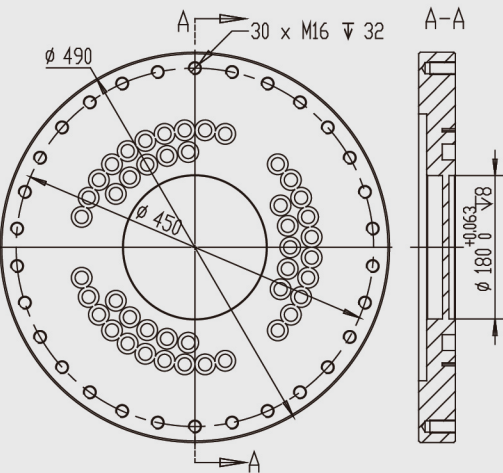

B-side view (Base mounting dimensions)

